

INFORMATION OF POLITABER AUTOADHESIVA SHEET

ASFALTOS CHOVA, S.A.
Ctra. Tavernes a Liria, km 4,3. 46760 TAVERNES DE LA VALLDIGNA. Valencia
Standard UNE-EN 13707

Sheet of 1 m x 6 m x 4,0 kg/m² of self-adhesive bitumen with glass fibre felt armor, silicone removable plastic inner finishing, and outer with mineral granules. Place self-adhered, on primed support.

Recommended for: anti-capillary barrier sheet; secondary waterproofing under tile (in sloping roof).

Not recommended for: monolayer system in flat roof; top sheet in green roof.

TEST	METHOD	VALUE	UNIT	TOLERANCE
Traction resistance in longitudinal direction:	EN 12311-1	350	N / 5 cm	± 100 N / 5 cm
Traction resistance in transversal direction:	EN 12311-1	250	N / 5 cm	± 100 N / 5 cm
Elongation in longitudinal direction:	EN 12311-1	PND	%	
Elongation in transversal direction:	EN 12311-1	PND	%	
Resistance to a static load:	EN 12730	PND	kg	
Impact resistance:	EN 12691	PND	mm	
Tear resistance:	EN 12310-1	--		
Joint resistance: (To cutter)	EN 12317-1	--		
Pliability:	EN 1109	≤ -15	°C	
Durability: (Pliability)		- 5	°C	± 5
(Flow resistance)	EN 1296	70	°C	± 10
Tightness:	EN 1928	Pass		
Resistance to roots (penetration of):	prEN 13948	--		
Dangerous substances:	--	PND		


Pass ⇨ Positive or correct; NPD ⇨ No Performance Declared; -- ⇨ Not required

OTHER ADDITIONAL FEATURES OF POLITABER AUTOADHESIVA SHEET

	AENOR		LBA-40/G-FV	
Designation:	EN 1850-1		No visible effects	
Visible defects:	EN 1849-1	4,0	kg/m ²	-5 / +10 %
Mass per unit area:	EN 1848-1	6 x 1	m	≥
Roll size: (Length x Width)	--	180	m ²	--
Presentation in pallets containing:	EN 12039	20	%	-20 / +10 %
Dimensional stability:	EN 1107-1	PND	%	--
Designation:	EN 1110	≥ 70	°C	--
Flow resistance:				

Date: 1st October, 2008

DESCRIPTION OF POLITABER AUTOADHESIVA SHEET

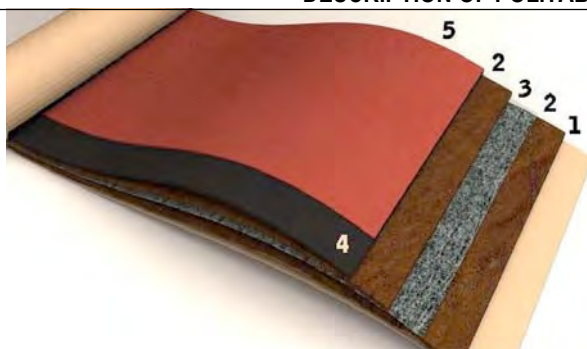

5. Mineral granule (Dark Red colour)
4. Overlapping band. 8 cm
3. Glass fibre felt.
2. POLITABER self-adhesive - SBS Bitumen
1. Silicon plastic film. Removable

Provided information matches up with data obtained in our own laboratories and/or accredited external laboratories. This product will maintain these characteristics on average. ChovA, S. A. reserves the right to modify or cancel any parameter without previous notice. ChovA, S. A. guarantee is limited to the product quality. As for commissioning work, which do not participate, the product installation instructions must be followed carefully. Soundproofing values may differ from those shown here due to improper execution of work. This technical file will be voided by subsequent revisions and, if in doubt, request the latest revision.