




ChovA

SISTEMAS DE IMPERMEABILIZACIÓN
Y AISLAMIENTO

CHOVASTAR® REJUNTEX

EXPANDED POLYETHYLENE CORD

TECHNICAL FILE Nº 50090 - REVIEW 2/08
THIS REVIEW CANCELS PREVIOUS

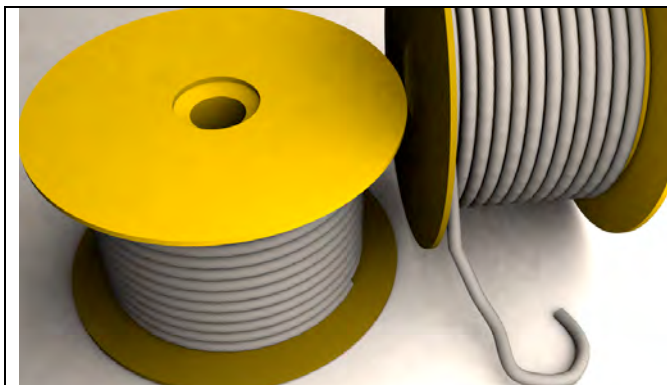

Solid expanded polyethylene cord, closed cell.

To be used as filler and depth limiter in sealing expansion joints, longitudinal or transverse..

OTHER APPLICATIONS.

Fill joints prior to sealing in glazing (window frames, etc.);

Exterior joints in facades, pavement joints;

In joints of buildings, walls, etc.

Joints in tracks and airports.

TECHNICAL CHARACTERISTICS

NOMINAL DIAMETER (mm)	DENSITY (kg/m ³)	TRACTION RESISTANCE (kPa)	TRANSVERSE DEFORMATION RESISTANCE (kg/cm)		
			10 %	25 %	50 %
20 + 1	25 + 5	200	0,21	0,53	1,51
25+ 1	25 + 5	200	0,35	0,84	2,15
30+ 1,5	25 + 5	200	0,51	1,21	3,00

SUPPLY: In boxes of 600 x 580 x 580 mm. (Containing a roll of defined diameter)

The rolls have respective lengths:

350 ± 5 % lineal m..... Diameter 20 mm.
 200 ± 5 % lineal m..... Diameter 25 mm.
 160 ± 5 % lineal m..... Diameter 30 mm.

Properties:

- Exceptional adaptability and flexibility;
- Excellent recovery after compression;
- High dimensional stability;
- Easy application and clean handling;
- Excellent durability;
- High chemical resistance:
 - Common acids (Except concentrate nitric)
 - Alkalis;
 - Solvents;
 - Lubricating oils;
 - Detergents;
- Water absorption. Irrelevant value;
- Service temperature between – 40 °C y + 60 °C.

Comfortable, easy and clean application. The cord is compressed and inserted into the joint (always a bit smaller than the chosen cord). Push off with a blunt object, without sharp edges. Apply to the desired depth.

Then sealing mastic shall be applied which can be: **CHOVASTAR® (SILICONA USO GENERAL; SANITARIOS; SILICONA NEUTRA; SELLADOR-AHDESIVO POLIMERO MS; MS CONSTRUCCION; JUNTAS Y GRIETAS; PEGA-SELLA; POLIURETANO CONSTRUCCIÓN.**

(REJUNTEX is compatible with all king of indicated mastics).

Provided information matches up with data obtained in our own laboratories and/or accredited external laboratories. This product will maintain these characteristics on average. ChovA, S. A. reserves the right to modify or cancel any parameter without previous notice. ChovA, S. A. guarantee is limited to the product quality. As for commissioning work, which do not participate, the product installation instructions must be followed carefully. Soundproofing values may differ from those shown here due to improper execution of work. This technical file will be voided by subsequent revisions and, if in doubt, request the latest revision.