


DESCRIPTION

Galvanized metal profile to meet the waterproofing sheet with a vertical wall.

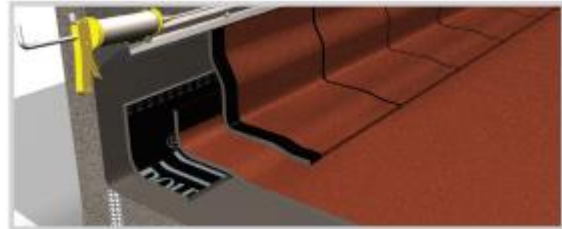

CHEMICAL COMPOSITION

ELEMENT	%
C	0,04
Mn	0,2
S	0,012
Re	227
Rm	335
ABO	34

From the supplied plates, the profiles are cut. Of dimensions 2.000 x 70 x 0,4 mm.

Galvanized metal profile for the delivery of the waterproofing in vertical facing on the roof or at the top of the wall.

The metal profiles will be placed, always using suitable mechanical fixing elements and anchored to the wall, separated by a maximum of 25 cm. The lower edge of the profile should overlap at least 4cm above the termination strip. If the mechanical fasteners of the profile pass through the sheet, they should be applied at least 20 cm above the highest point of the cover. Place with the rounded flange part in contact with the sheet to avoid cutting the sheet.

Place together with a bead of outdoor putty located in the upper part, between the profile and the facing. Place the bead on the upper part of the face of the profile in contact with the vertical facing or wall, before placing the profile on the facing or wall.

The information provided corresponds to data provided by the provider. This product will maintain these characteristics on average. **ChovA, S. A.** reserves the right to modify or cancel any parameter without prior notice. The guarantee of **ChovA, S. A.** is limited to the quality of the product. As for the commissioning, in which we do not participate, the requirements for the execution of the work must also be met. This data sheet will be annulled by subsequent revisions and, in case of doubt, request the latest revision.